

**Model: XLCL320CL**  
**Weatherproof-Ceiling**



**General Data**

Lamp Type	SMD2835
System Watts	24 W
Lumens	2100 lm
Lamp Life	50000 hrs
CRI	>80 Ra
Beam Angle	120°
IP Rating	IP 65
Voltage	220-240V
CCT	3000/6500K
Oper. temp.	-20 to +40
Dimension	320x320x75

**Construction Data**

IP rating	IP 65 Outdoor
Housing	PC housing
Protection finishing	/
Glass	PC cover
Loading capacity	/
Cable Gland	IP65
Gasket	Silicone rubber gasket

**Electrical Data**

Input voltage	220-240V
Cable	/

**Accessories**

Mounted Accessory	/
Clip	/

**APPLICATIONS**

Ideal for general lighting indoors or outdoors, commercial and residential applications.


**PRODUCT DESCRIPTION**

Surface mounted or suspended mounted LED Weatherproof Injection for PC housing and PC cover, offering IP65 protection against moisture and dust.

**FIXTURE CONSTRUCTION**

PC housing and PC cover locked by screws, vandal proof.

**Dimension Drawing**

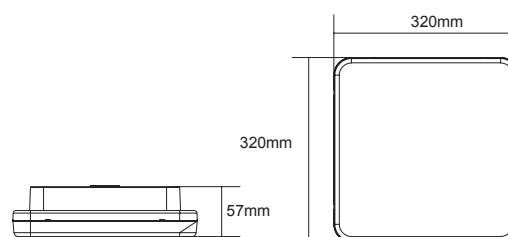


**Lamp Options**

Part Number	CCT
XLCL320CL3	3000 K
XLCL320CL65	6500 K

Light Distribution Curve [Unit: cd]

**Photometric Data**

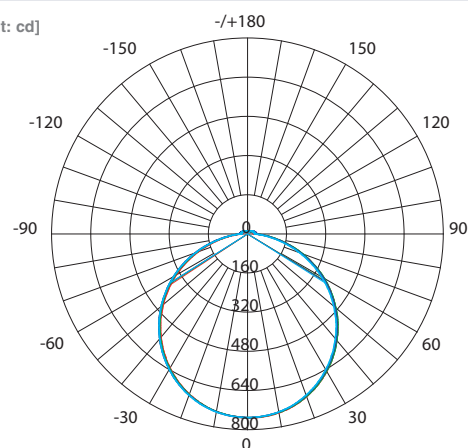

Beam angle

1m	205. 8, 751. 31 x	315. 75cm
2m	51. 45, 187. 81 x	631. 50cm
3m	22. 87, 83. 481 x	947. 26cm
4m	12. 86, 46. 961 x	1263. 01cm
5m	8. 233, 30. 051 x	1578. 76cm
6m	5. 717, 20. 871 x	1894. 51cm
7m	4. 200, 15. 331 x	2210. 26cm
8m	3. 216, 11. 741 x	2526. 02cm
9m	2. 541, 9. 2751 x	2841. 77cm
10m	2. 058, 7. 5131 x	3157. 52cm