

## Model: OLS10A



### Lamp Options

Part Number	CCT	Beam angle
OLS10AC3	3000 K	/
OLS10AC4	4000 K	/

### General Data

Power	120 W
LED type	PHILIPS
Luminous flux	15000 lm
CCT	3000K or 4000K as standard. Different CCT upon request.
CRI	70+
Dimension	381x765x131mm
Cut out dia.	/
Weight (kgs)	/
Lamp Life	50000 hrs
SDCM	≤5
Ambient Temp.	-35~50°C
RAL Color	7024
Certifications	CE, RoHS

### Construction Data

IP rating	66 waterproof
Housing	Solid aluminum housing CNC machined body
Protection finishing	passivated (anodizing) anti-corrosion finishing
Glass	Tempered glass diffuser
Loading capacity	/
Cable Gland	IP66
Gasket	Silicone rubber gasket

### Electrical Data

Input voltage	AC 100~240V
Cable	/

### APPLICATIONS

These lights are widely used in exterior applications, such as Urban or Street lighting, highway, main roads, parking lot, etc.


### PRODUCT DESCRIPTION

Street luminaire for outdoor installation, aluminum body, Glass diffuser, stainless steel screws, Low power PHILIPS LED, IP66 rating.

### FIXTURE CONSTRUCTION


Housing is made of corrosion-resistant die-cast aluminum, Polyester Powder-coated finishing, chemical wash treated. Stainless steel M8 bolts for mounting. Flat toughened glass to prevent upward light. Fixed to the frame with metal clips, silicon gasket, IP66 rated.

### Dimension Drawing

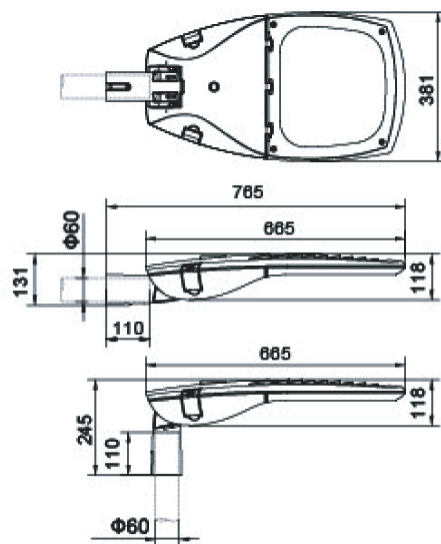

### Photometric Data

Light Distribution Curve

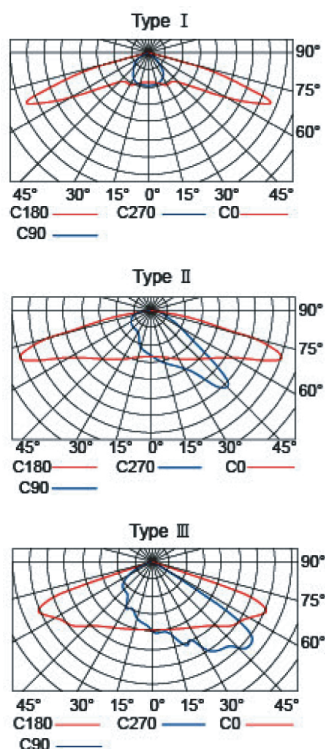

Illumination Drawing

