

Model: XLMTADX



XLMTADXA




XLMTADXB



General Data

Model	XLMTADXA	XLMTADXB
System Watts	10W	
Beam angle	110°	15°/24°/35°/55°
Lamp Lumens	75-80lm/w	
Dimensions mm	125x21.5x79	
Lamp Type	SMD	
CRI	≥90	
Lamp Life	50000 hrs	
IP Rating	20	
Input voltage (V)	48V-50/60Hz	
Body Color	White/black	
CCT	3000K/4000K	

Dimensions

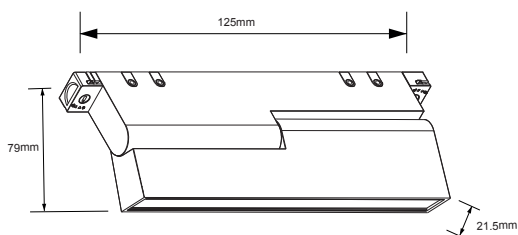

Photometric Data

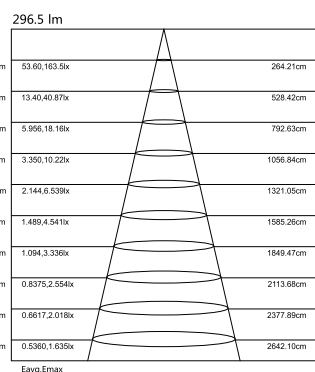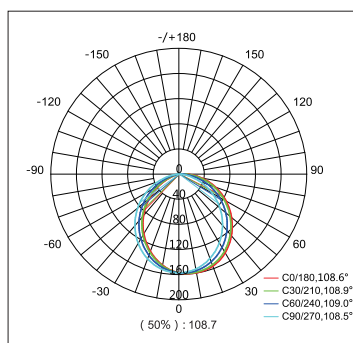

APPLICATIONS

Ideal for application where comfort and nice atmosphere is required. Its widely applied to retail lighting and other high-end commercial areas.

PRODUCT DESCRIPTION

10W Magnetic Flood / Grille. Easy installation and removal from track. Optimal thermal dissipation. CCT, 3000K, 4000K, and multiple beam angles.

FIXTURE CONSTRUCTION

Made of die cast aluminum body and heat sink and aluminum reflector. The adaptor locks the Flood / Grille positively to the track, LED light source. comes in white, black.

XLMTADXA 10W lamp options white

Part Number	CCT	B. angle
XLMTADXAC3B110WH	3000 K	110°
XLMTADXAC4B110WH	4000 K	110°

XLMTADXA 10W lamp options black

Part Number	CCT	B. angle
XLMTADXAC3B110BL	3000 K	110°
XLMTADXAC4B110BL	4000 K	110°

XLMTADXB 10W lamp options white

Part Number	CCT	B. angle
XLMTADXB3B15WH	3000 K	15°
XLMTADXB3B24WH	3000 K	24°
XLMTADXB3B35WH	3000 K	35°
XLMTADXB3B55WH	3000 K	55°
XLMTADXB4B15WH	4000 K	15°
XLMTADXB4B24WH	4000 K	24°
XLMTADXB4B35WH	4000 K	35°
XLMTADXB4B55WH	4000 K	55°

XLMTADXB 10W lamp options black

Part Number	CCT	B. angle
XLMTADXB3B15BL	3000 K	15°
XLMTADXB3B24BL	3000 K	24°
XLMTADXB3B35BL	3000 K	35°
XLMTADXB3B55BL	3000 K	55°
XLMTADXB4B15BL	4000 K	15°
XLMTADXB4B24BL	4000 K	24°
XLMTADXB4B35BL	4000 K	35°
XLMTADXB4B55BL	4000 K	55°

